

UNILIFT CC


The Grundfos Unilift CC pumps are single-stage submersible pumps that can pump up to 3 mm water level. The pumps are designed for pumping rainwater and grey wastewater from:

- Washing machines, bath tubs, showers, sinks from low-lying parts of the buildings up to sewer level
- Cellars or buildings prone to flooding
- Draining wells
- Collecting wells for surface water with inlets from roof gutters, tunnels
- Swimming pools, ponds or fountains. The pumps are suitable for permanent installation or as a portable pump

KEY FEATURES

- Pumping down to a level of 3 mm above floor
- Prevention of back-flow
- Thermal overload protection
- Handy and easy to transport
- Self-venting valve
- Auto-restart
- Can be connected to different outlet sizes using an adaptor

PERFORMANCE CURVE

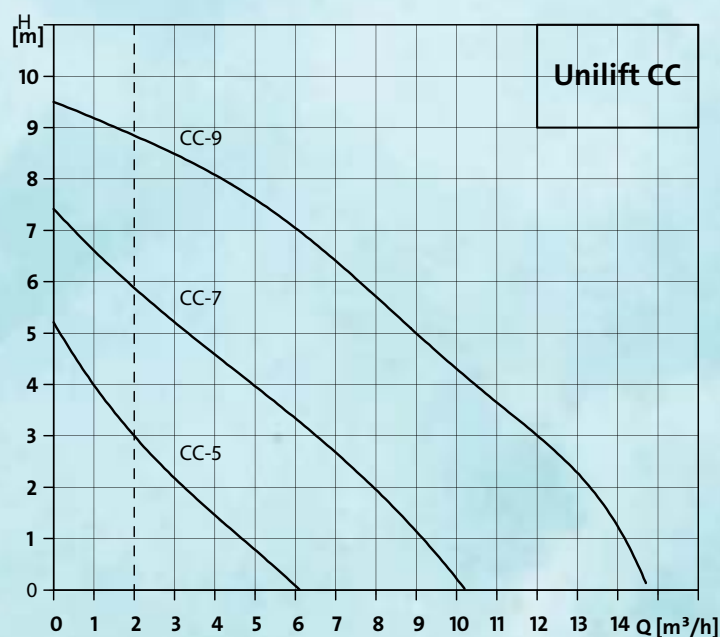


TECHNICAL DATA


- **Max. flow rate, Q** : 14 m³/h
- **Max. head, H** : 9 m
- **Liquid temp.** : 0 °C to +40 °C
- **Max. particle size** : 10 mm
- **Material** : Composite
- **Installation depth** : Max. 10 metres below liquid level

SELECTION

The overview below is suitable for the selection of the correct size of Unilift CC pumps used in stationary applications. The flow velocity through the discharge pipe must be minimum 0.7 m/s to ensure self-cleaning.

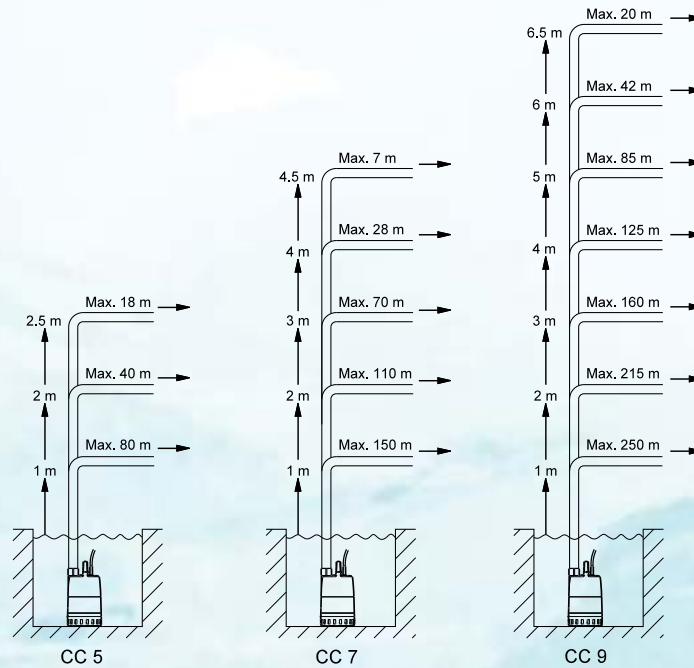

INSTALLATION

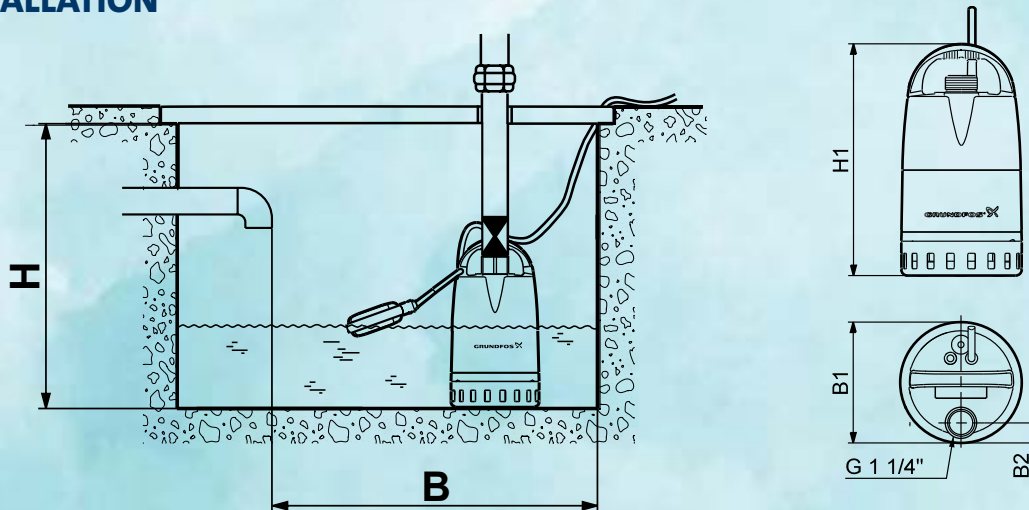

PRODUCT RANGE

Part Code	Model	Voltage (V)	Power		Current I (A)	Min Tank Size		Pump Dimension (mm)			Outlet Pipe Size	Weight (kg)
			kw P1	Hp		H	B	H1	B1	B2		
96280966	UniliftCC5-A1	1 x 220-240	0.24	0.32	1.1	520	400	305	160	26.5	1 ¼	4.35
96280968	UniliftCC7-A1	1 x 220-240	0.38	0.51	1.7	520	400	305	160	26.5	1 ¼	4.60
96280970	UniliftCC9-A1	1 x 220-240	0.78	1.05	3.7	570	500	340	160	26.5	1 ¼	6.50